


AUTOMATIC TDS CONTROL SYSTEM T2

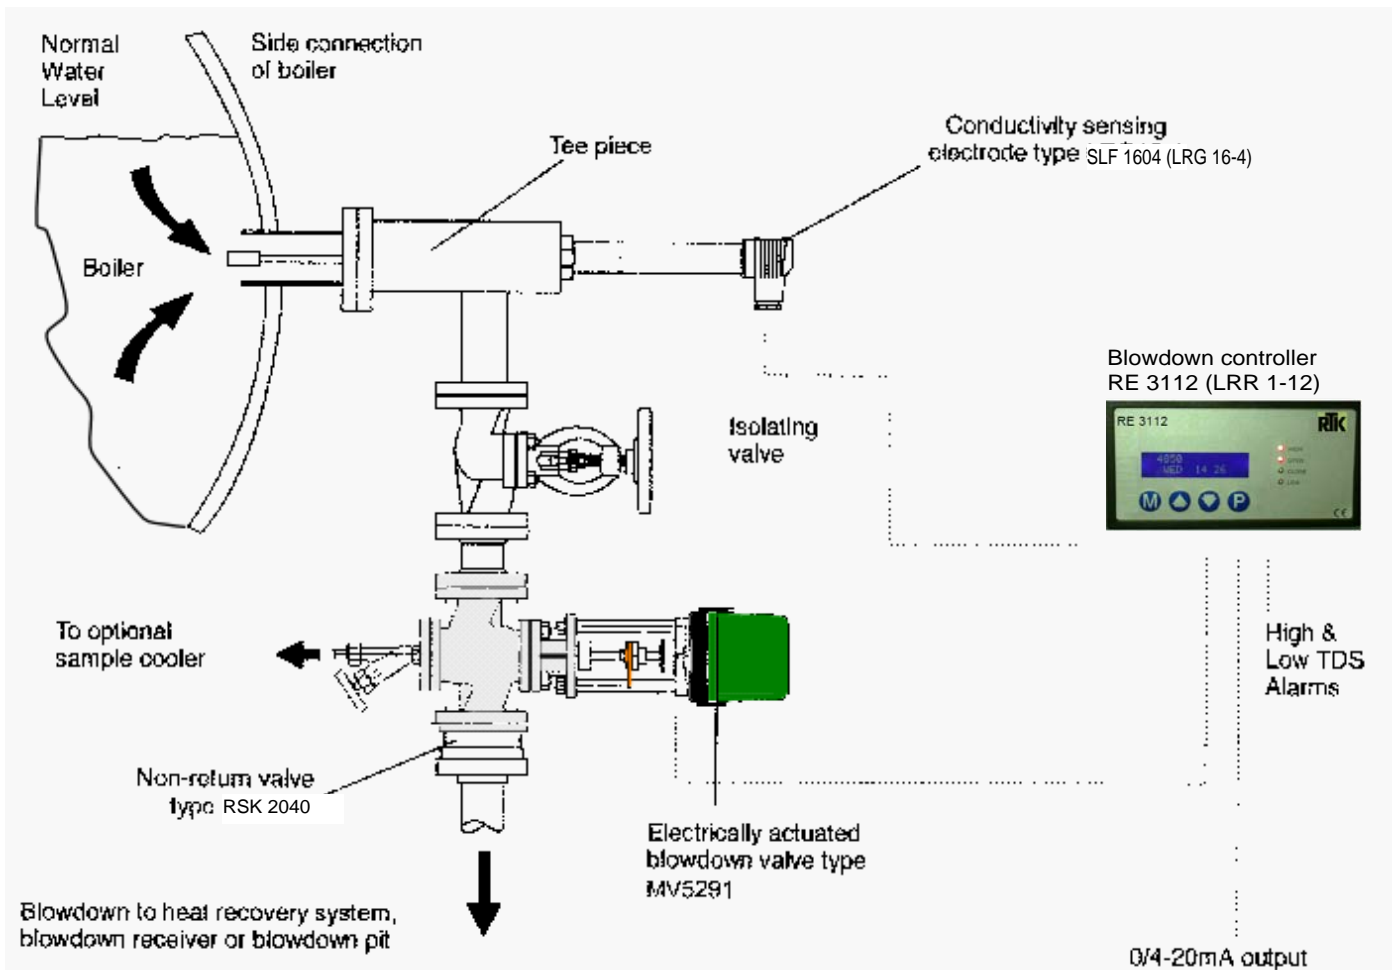

- Fully automatic TDS control.
- Continuous TDS monitoring with digital displays of boiler water TDS and time.
- When TDS is low, valve simply remains closed. No sampling losses.
- Uses a single boiler connection for both TDS sensing and blowdown.
- Saves water treatment and chemical costs.
- Accurate TDS control saves energy by reducing the blowdown rate to the minimum.
- Reduces water consumption and effluent disposal charges.
- Full product support, commissioning and service facilities nationwide.